








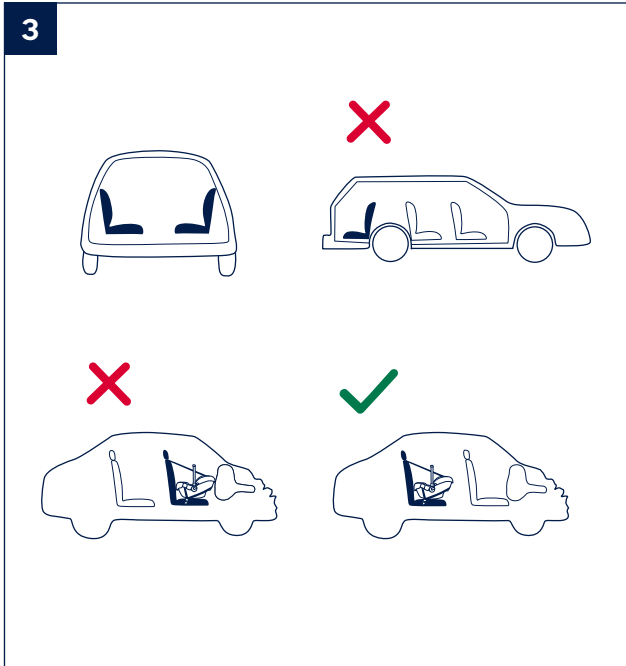




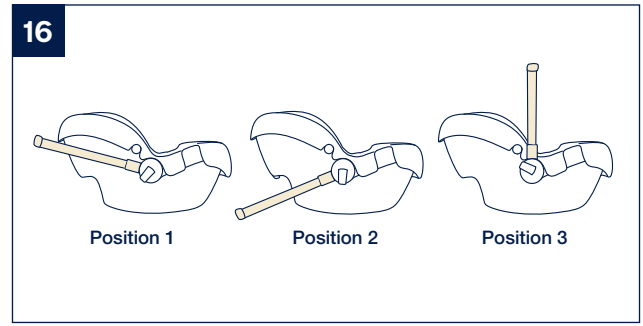











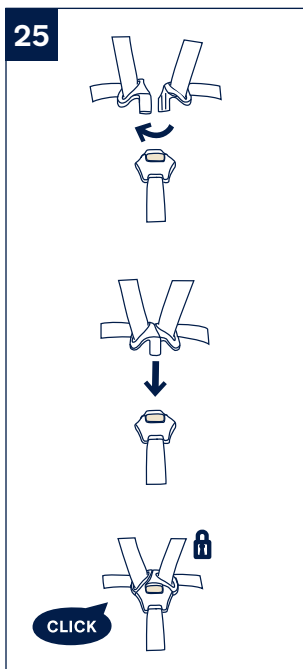






*Designed*  
**around your life**









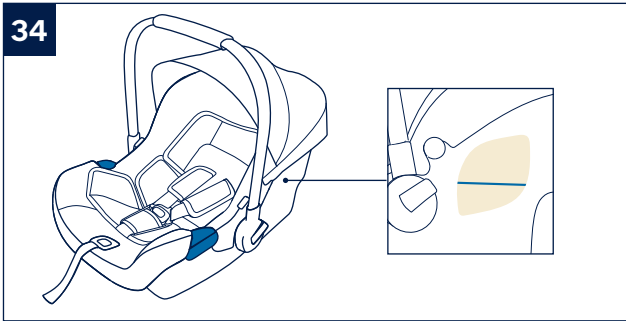

**IMPORTANT!**  
**KEEP THESE**  
**INSTRUCTIONS FOR**  
**FUTURE REFERENCE:**  
*READ CAREFULLY*

# Contents

<b>Product information</b>	<b>3</b>
Product Registration	3
Warranty	3
<b>Child Usage Requirements</b>	<b>4</b>
<b>For use without base</b>	<b>4</b>
<b>Parts List</b>	<b>5</b>
<b>Warnings</b>	<b>7</b>
<b>Product Use</b>	<b>11</b>
<b>Cleaning and Maintenance</b>	<b>16</b>
繁中	17

# Product Information

Model Number: \_\_\_\_\_

Manufactured in (date): \_\_\_\_\_

## Product Registration

Please fill in the above information. The model number and the manufactured in date are located on a label on the bottom of your child restraint.

**To register your product please visit:**  
[www.nunababy.com/tw/gear-registration](http://www.nunababy.com/tw/gear-registration)

## Warranty

We have purposely designed our high-quality products so that they can grow with both your child and your family. Because we stand by our product, our gear is covered by a custom warranty per product, starting from the day it was purchased. Please have the proof of purchase, model number and manufactured in date available when you contact us.

**For warranty information please visit:**  
[www.nunababy.com/tw/warranty](http://www.nunababy.com/tw/warranty)

# Child Usage Requirements

This Infant child restraint is suitable for use with children who meet the following requirements:


**Weight:** under 13 kg (approximately 1.5 years old or under)

**Group:** 0+

## For use without base



- 1 - This Infant child restraint is a 'Universal' child restraint, for general use in vehicles and it will fit most, but not all, car seats.
- 2 - A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a 'Universal' child restraint for this age group.
- 3 - This Infant child restraint child restraint has been classified as 'Universal' under more stringent conditions than those which applied to earlier designs which do not carry this notice.
- 4 - This Infant child restraint is only suitable for use in the listed vehicles fitted with 3-point retractor safety-belts, approved to European Regulation No. 16 or other equivalent standards.
- 5 - If in doubt, please consult the child restraint manufacturer or the retailer.

Please keep the instruction manual in the infant child restraint as figure. Read these instructions carefully before use and keep them for future reference.



## Parts List

- |   |                         |    |                         |
|---|-------------------------|----|-------------------------|
| 1 | Seat Pad                | 8  | Canopy Mount            |
| 2 | Side Guides             | 9  | Canopy                  |
| 3 | Infant Insert           | 10 | Handle                  |
| 4 | Adjustment Webbing      | 11 | Handle Button           |
| 5 | Adjustment Button       | 12 | Rear Guide              |
| 6 | Safety Buckle           | 13 | Stroller Release Handle |
| 7 | Shoulder Harness Straps |    |                         |

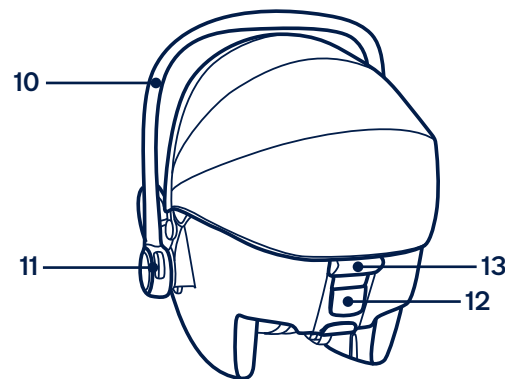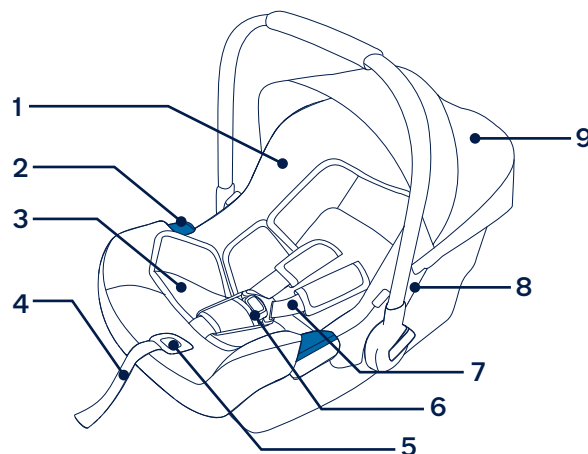



## WARNING

This Infant child restraint is designed **ONLY** for child weighing under 13kg.

Any straps holding the restraint to the vehicle should be tight, that any straps restraining the child should be adjusted to the child's body, and that straps should not be twisted.

The importance of ensuring that any lap strap is worn low down, so that the pelvis is firmly engaged, shall be stressed.

The Infant child restraint should be changed when it has been subject to violent stresses in an accident.

Concern the danger of making any alterations or additions to the device without the approval of the Type Approval Authority, and a danger of not following closely the installation instructions provided by the Infant child restraint manufacturer.

The Infant child restraint should be kept away from sunlight, otherwise it may be too hot for the child's skin.

Child is not left in the Infant child restraint system unattended.

Any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.

The Infant child restraint shall not be used without the soft goods.

The soft goods should not be replaced with any besides the ones recommended by the manufacturer. The soft goods constitute an integral part of the Infant child restraint performance.

**DO NOT** use any load bearing contact points other than those described in the instructions and marked on the Infant child restraint.

The rigid items and plastic parts of a Infant child restraint shall be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.

Do not to use the Infant child restraint in seating positions where an active frontal airbag installed.

NO Infant child restraint can guarantee full protection from injury in an accident. However, proper use of this Infant child restraint will reduce the risk of serious injury or death to your child.

**DO NOT** use or install this Infant child restraint until you read and understand the instructions in this manual and in your vehicle owner's manual.

**DO NOT** use this Infant child restraint if it has damaged or missing parts.

**DO NOT** have your child in large/oversized clothes because this may prevent your child from being properly and securely fastened by the shoulder harness straps and the harnesses between thighs.

**DO NOT** leave this Infant child restraint or other items unbelted or unsecured in your vehicle because unsecured Infant child restraint can be thrown around and may injure occupants in a sharp turn, sudden stop, or collision.

**NEVER** use a second-hand Infant child restraint or an infant child restraint whose history you do not know because they may have structural damage that endangers your child's safety.

**NEVER** use ropes or any other substitutes to secure Infant child restraint in vehicle or to secure child into Infant child restraint. Only use vehicle belt to secure Infant child restraint in vehicle.

Remove this infant child restraint from the vehicle seat when it is not in regular use.

Consult the distributor for issues concerning maintenance, repair and part replacement.

To avoid the risk of falling out, always secure the child using the safety harness when the child is placed in Infant child restraint, even when the Infant child restraint is not in the vehicle.

Before carrying the infant child restraint by hand, ensure that the child is fastened with the safety harness, and that the handle is correctly locked in a vertical position.

**DO NOT** put anything other than the recommended inner cushions in this Infant child restraint.

To avoid serious injury or death, **NEVER** place infant child restraint on elevated surface seat with child in it.

The parts of this Infant child restraint should not be lubricated in any way.

Always secure child in Infant child restraint, even on short trips, as this is when most accidents occur.

**DO NOT** use this Infant child restraint for more than 5 years after the purchase date as parts may degrade over time, or from exposure to sunlight, and may not perform adequately in a crash.

# Product Use

## Installation Concerns

DO NOT install this Infant child restraint on vehicle seats with 2-Point Retractor Safety Belts without the Base. **(1)**

This Infant child restraint is suitable for vehicle seats with a 3-point Retractor Safety Belt (with or without base) ONLY. **(2)**

DO NOT install this Infant child restraint on vehicle seats that face sideways **(3)** or rearward **(3)** with respect to the moving direction of the vehicle.


DO NOT place rear-facing child restraint on front seat with air bag. Death or serious injury may occur. **(3)**  
Please reference vehicle owner's manual for more information.


It is recommended to install this Infant child restraint on the rear vehicle seat. **(3)**

DO NOT install this Infant child restraint on vehicle seats unstable during installation.

## Shoulder harness position

Check that Shoulder Harness Straps are set at the proper height. Please choose the proper pair of shoulder harness slots according to the child's height.

 Shoulder Harness Straps must go into the harness slots nearest to your child's shoulders **(4)**, but not above the shoulder line. **(5)**

 If the Shoulder Harness Straps are not at proper height, the child might be ejected the infant child restraint if there is a crash.

## Shoulder harness straps height adjustment



Use extreme care in threading the Shoulder Harness Straps according to the figure. If the Shoulder Harness Straps are not secure, they will not protect your baby.

The ends of the Shoulder Harness Straps must hang in front of the junction plate.

Ensure that the shoulder harness straps are not twisted before reassembling the ends onto the junction plate.

- 1** - Press the adjustment button at the front of the seat and pull on the shoulder harnesses to loosen them. **(6)**
- 2** - At the back of the seat, take the harness ends off the metal junction plate. **(7)**
- 3** - Pull the harnesses through the slots in the seat. Insert them into the appropriate set of slots. **(8)**
- 4** - Reassemble the harness ends onto the junction plate. **(9)**

The ends of the Shoulder Harness Straps have two loops.

-  For a smaller baby, use the upper shoulder harness loops. **(10)**
-  For a larger baby, use the end shoulder harness loops. **(11)**

## Crotch belts

Identify crotch belt slot that will achieve a snug fit. Change crotch belt slot if necessary. **(12)**

- 1** - Smaller babies use this position. Crotch belt is threaded through rear slot and up through front slot as shown. **(13)**
- 2** - Medium sized babies use this position. Crotch belt is threaded into rear slot as shown. **(14)**
- 3** - Larger babies use this position. Crotch belt is threaded through front slot as shown. **(15)**

## Handle adjustment

- 1** - The handle of the infant child restraint can be adjusted to **3** positions.  
Position for car, hand or stroller transportation. **(16) -3**
- 2** - To adjust the handle position, squeeze handle buttons on both sides to release it. **(17) -1**
- 3** - Rotate handle until it clicks into any of the **3** positions. **(17) -2**

## Installation without base

- 1** - Place the infant child restraint onto the vehicle seat where you wish to put it. Pull the vehicle safety belt out and lock it into the vehicle buckle, sliding the vehicle lap belt into the side guides of the infant child restraint. **(18)**

- ⚠** The child restraint can not be used if the vehicle safety belt buckle (female buckle end) is too long to anchor the child restraint securely. **(18)-1**
- 2** - Pull the diagonal belt behind the front end of the child restraint and then through the blue belt guide. **(19)**
- 3** - Pull the vehicle shoulder belt to fasten the infant child restraint tightly and securely. **(20)**
- 4** - Level line on carrier must be level to the ground when the child restraint is installed. **(34)**
- ⚠** Tension the vehicle safety belt as much as possible, checking that it is not loose or twisted.
- ⚠** After installing the infant child restraint, always check that the vehicle belts are routed correctly and securely fastened into the vehicle buckle. **(21)**

## Securing child

Foam inside infant insert is present to ensure that harness fits child properly. Infant insert must be used for children **0-6** months.

After the child is placed into the seat, check whether the Shoulder Harness Straps are at proper height.

- 1** - While pressing the adjustment button located at the front of the infant child restraint, pull completely the two Shoulder Harness Straps of the infant child restraint. **(22)**
- 2** - Unlock the buckle of the harnesses by pressing the red button. **(23)**

- 3** - Place the child into the infant child restraint and lock the buckle. **(24)** Please refer to **(25)**.
- 4** - Tighten the shoulder harness straps by pulling the adjustment webbing. **(26)**
- !** Make sure the space between the child and the Shoulder Harness Straps is about the thickness of one hand.

## Canopy

- 1** - Unzip the zipper behind the front canopy bow. **(27)**
- 2** - Pull the canopy out of the compartment. **(28)**
- 3** - Attach the magnets on each corner to the front of the child restraint. **(29)**

## Detach canopy and seat pad

- 1** - To disassemble the canopy, press the button in the canopy mount and pull the canopy bow out. **(30)**
- 2** - Pull the fastening pieces underneath the edge of the seat out. **(31)**
- 3** - Pull the harness out of the metal junction plate. **(7)**
- 4** - Remove the seat pad from the adjustment button as shown in. **(32)**
- 5** - Remove the seat pad from the Stroller release button as shown in. **(33)**

## Cleaning and Maintenance

After child is older than 6 months, please remove the foam from the infant insert and store it somewhere your child cannot access it.

Please wash the soft goods with cold water under 30°C.

Do not iron the soft goods.

Do not bleach or dry clean the soft goods.

Do not use undiluted neutral detergent, gasoline or other organic solvent to wash the infant child restraint. It may cause damage to the infant child restraint.

Use only mild detergent, water and a soft cloth to clean the child restraint shell, handle and harness straps.

Do not twist the soft goods to dry with great force. It may leave the soft goods with wrinkles.

Please hang dry the soft goods in the shade.

Please remove the infant child restraint from the vehicle seat if not in use for a long period of time. Put the infant child restraint in a cool, dry place and somewhere your child can not access it.

## 請妥善保存本說明書 以備不時之需!

使用產品前請仔細閱讀本說明書，並妥善保存以供日後參照。不依照本說明書的指示操作，可能會影響到您寶寶的安全。

## 目錄

產品資訊	19
保固與售後服務	19
保固條件	19
寶寶使用要求	20
單獨使用嬰兒提籃	20
產品組件及各部件名稱	21
警告	23
產品使用	26
保養與維護	30

# 產品資訊

產品名稱：\_\_\_\_\_

生產日期：\_\_\_\_\_

## 保固與售後服務

產品於保固期間內發生問題，請與零售商聯絡；若零售商無法提供服務，他們會聯絡當地的Nuna經銷商。請留意產品底部的產品型號與生產日期序號。當有保固需求時，請提供以上產品資訊。

請至[www.nunababy.com/tw/gear-registration](http://www.nunababy.com/tw/gear-registration)

網站登記您購買的產品。

## 保固條件

保固始於產品購買日，我們提供維修服務，但不提供產品退換。保固期限不會因零件更換或維修而延長。Nuna有權利針對產品進行改善設計，此前製造的產品則無更換義務。

相關保固資訊，詳見官網：

[www.nunababy.com/tw/warranty](http://www.nunababy.com/tw/warranty)

產品名稱 汽車用兒童保護裝置

型 號 CS-01-001, CS035

主要材質 塑膠、五金、布

原 產 地 中國

# 寶寶使用要求

本產品適合於滿足下列要求的寶寶：

適用範圍 13公斤(約1.5歲)以下的寶寶

適用群組 0+

## 單獨使用嬰兒提籃



- 1- 此為通用型兒童保護裝置，符合台灣標準 CNS 11497 及歐洲標準ECE R44。作為通用兒童保護裝置，其適用大部分（並非全部）之車輛座椅。
- 2- 若車輛製造商在車主使用手冊中述明其可適用此質量等級之「通用型」兒童保護裝置，則本裝置可安裝於該車輛上。

3 - 此兒童保護裝置歸類為「通用型」，比其他無標示此注意事項之兒童保護裝置可適用於較多車輛。

4 - 本兒童保護裝置適用於符合CNS 3972或ECE R16或其它等效標準之3點式安全帶之車輛座椅使用。


5 - 若有疑問，請洽兒童保護裝置進口商。

請將本說明書存放在嬰兒提籃上(如下圖)。組裝和使用本產品之前，請務必詳細閱讀說明書。

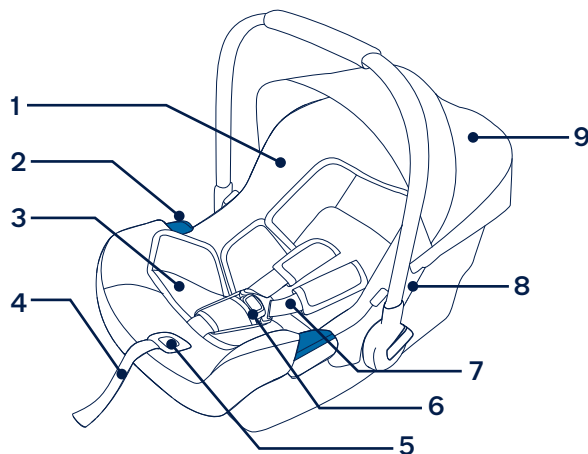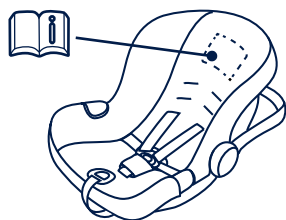

## 產品組件及各部件名稱

- |        |           |
|--------|-----------|
| 1 座墊   | 8 遮陽篷固定座  |
| 2 側面卡槽 | 9 遮陽篷     |
| 3 小座墊  | 10 把手     |
| 4 調整織帶 | 11 把手按鈕   |
| 5 調整按鈕 | 12 後向卡槽   |
| 6 安全扣  | 13 推車釋鎖手把 |
| 7 肩帶   |           |

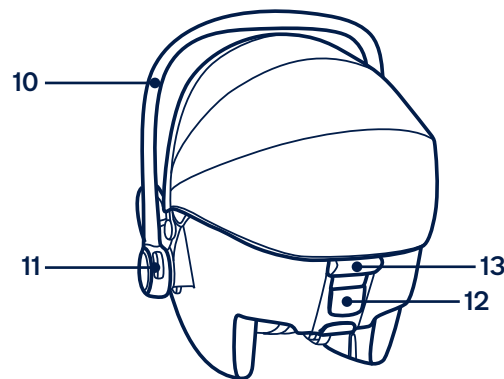



## 警告

本嬰兒提籃適用於體重**13公斤**以下的寶寶。

任何束縛兒童保護裝置至車輛之織帶應束緊，任何束縛兒童之織帶應根據兒童身體進行調整，且此織帶不應扭曲。

將您的寶寶放入嬰兒提籃後，必須正確的扣合及使用嬰兒提籃安全帶，並確保腰部織帶能有效束縛骨盆部位。

本兒童保護裝置若於意外中遭受劇烈撞擊後，不可繼續使用，應立即更換兒童保護裝置。意外可能導致兒童保護裝置產生潛在危險。

請勿在兒童保護裝置上進行未經驗證許可之改裝或增加其他裝置以及未依兒童保護裝置製造商提供之安裝說明使用，以免造成受傷或死亡。

請讓座椅遠離日光，以免產品溫度過高對兒童的皮膚造成傷害。

在無人照料下，不得讓兒童留在兒童保護裝置內。

任何行李或其他可能在碰撞中造成傷害之物品應適當牢固。

當本嬰兒提籃沒有座布時，請勿使用。

請勿使用任何非製造商所推薦的座布進行取代，因為座布是保證束縛裝置性能完整的組件。

不可使用除使用說明書中所標注以外之其他受力點。

請勿讓汽車車門卡住嬰兒提籃的任何組件。

嚴禁將本嬰兒提籃裝置於設有正面氣囊的座位上使用。

沒有任何嬰兒提籃可以保證**100%**遠離傷亡，然而正確的使用本嬰兒提籃可以降低寶寶傷亡的機率。

請勿在未閱讀或了解本嬰兒提籃說明書及汽車說明書之前，使用或安裝本嬰兒提籃。

本嬰兒提籃如有任何損壞或零件缺失時，請勿繼續使用。

請勿讓您的寶寶穿著過大的衣物，所穿的衣物必須能讓嬰兒提籃的安全帶適當而安全地扣在寶寶兩腿之間。

請勿將未使用汽車安全帶固定住的嬰兒提籃留在車內，以免緊急剎車時，傷害到其他乘客。若不經常使用嬰兒提籃時，請將其搬離汽車座椅。

請勿使用二手嬰兒提籃或來歷不明的嬰兒提籃，因為它們可能存在危害寶寶安全的潛在危險。

不可使用繩子等其他物件代替汽車安全帶，以避免兒童被粗細繩索意外勒住。

長期不使用嬰兒提籃時，請將其搬離汽車座椅。

有關零件更換或維修問題，請向進口商查詢。

不管在哪種狀況下使用，把寶寶放入提籃後，請一直為寶寶繫好安全帶，以免寶寶從提籃內跌出。

手提嬰兒提籃前，請確認寶寶已繫好安全帶，且把手固定於直立段位。

請勿使用其他廠商的小座墊來配合本嬰兒提籃使用。如需更換配件時，請與進口商聯繫。

請勿將嬰兒提籃置於桌子、椅子等高於地面的平台上。

請勿使用任何潤滑劑擦拭本兒童安全座椅。

即使是在短途旅行上，寶寶也必須在兒童安全座椅內，因為這是大多數事故發生的時間。

購買五年後不可以再使用本兒童安全座椅，因為時間久了兒童安全座椅零件的性能可能會降低，或長期暴露在陽光下，這些情況都可能使兒童安全座椅在事故中不能充分發揮其保護作用。

## 產品使用

### 安裝注意事項

- ⚠ 請勿將此嬰兒提籃安裝在二點式安全帶的汽車座椅上，由於此種安全帶功能不完善，使用是非常危險的(1)
- ⚠ 此嬰兒提籃適合安裝在設置有三點式安全帶的汽車座椅上(2)
- ⚠ 請勿將此嬰兒提籃安裝在相對於汽車的行駛方向橫向或後向或設有正面氣囊(3)的汽車座椅上。
- ⚠ 請勿將此嬰兒提籃安裝在前座上，防止意外發生時造成寶寶傷亡(3)
- ⚠ 請勿將此嬰兒提籃安裝於可移動的汽車座椅上。

### 肩帶正確位置

請依照寶寶的身高，選擇一對高度合適的肩帶孔。

- ⚠ 肩帶須穿過最接近寶寶肩膀位置的肩帶孔(4)，肩帶位置太高是不正確的(5)
- ⚠ 若肩帶位置不合適，意外發生時可能造成寶寶被拋出嬰兒提籃的危險。

## 調整肩帶高度

請注意肩帶在安裝過程中必須要正確。如果安裝不正確，將不能保護您的寶寶安全。

肩帶末端必須固定在T型鐵片上。

請確認肩帶末端固定在T型鐵片之前沒被纏繞。

- 1- 按壓嬰兒提籃前端的調整按鈕，並向外拉肩帶，以調鬆肩帶(6)
- 2- 將嬰兒提籃背面的兩條肩帶從T型鐵片上取下(7)
- 3- 拉出肩帶，再將肩帶穿入高度合適的肩帶孔(8)
- 4- 將T型鐵片重新穿入肩帶末端的織帶環中(9)

肩帶末端有兩個肩帶環可供選擇。

- ⚠ 較小的寶寶可以使用上面肩帶環(10)
- ⚠ 較大的寶寶可以使用末端肩帶環(11)

## 調整胯帶位置

依寶寶大小，胯帶有3個段位可供調節(12)

- 1- 小寶寶使用時，胯帶穿過兩個胯帶孔(13)
- 2- 一般的寶寶使用時，胯帶穿過靠近寶寶的胯帶孔(14)
- 3- 更大的寶寶使用時，胯帶穿過遠離寶寶的胯帶孔(15)

## 調整把手

1- 把手有3個段位可供調整。

手提或置於汽車、推車內時，請用段位(16)-3

- 2- 調整把手位置時，先按壓兩邊的把手按鈕(17)-1
- 3- 將把手旋轉到適合段位後再鬆開把手按鈕(17)-2

## 單獨安裝嬰兒提籃

1- 將嬰兒提籃置於合適的汽車座椅上，拉出汽車安全帶後扣好汽車安全扣，再將汽車腰帶卡入嬰兒提籃兩邊的卡槽內(18)

⚠ 汽車安全帶母扣段若太長，汽車安全帶無法綁緊不能使用(18)-1

- 2- 將汽車肩帶卡入嬰兒提籃後面的卡槽內(19)
- 3- 用力拉緊汽車安全帶，使汽車安全帶緊實的繫住嬰兒提籃(20)
- 4- 當嬰兒提籃安裝在汽車座椅上時，貼標上的水平線必須與地面平行(34)
- ⚠ 盡力拉緊汽車安全帶，並確定汽車安全帶沒有鬆弛或扭曲。
- ⚠ 請檢查汽車安全帶是否正確固定嬰兒提籃(21)

## 寶寶乘坐

小座墊的作用是為了保護寶寶，**0-6個月**的寶寶必須使用小座墊。使用小座墊前，請裝上填充物。

將寶寶放入提籃後，請確認肩帶高度是否合適。

- 1- 按壓座椅前端的調整按鈕，並向外拉肩帶，以完全調鬆肩帶(22)
  - 2- 按壓紅色按鈕，鬆開安全扣(23)
  - 3- 將寶寶放入座椅，並扣合安全扣(24)(25)
  - 4- 向外拉調整織帶，調緊肩帶(26)
- ⚠ 請注意**，寶寶與肩帶之間須有一個手掌的間距。

## 使用遮陽片

- 1- 拉開遮陽篷上方的拉鏈(27)
- 2- 拉出遮陽片(28)
- 3- 通過磁鐵固定在嬰兒提籃兩側(29)

## 拆卸遮陽篷和座墊

- 1- 拆卸遮陽篷時，按壓遮陽篷卡座內的凸點，同時拔出遮陽篷條即可(30)
- 2- 將位於嬰兒提籃邊緣背面的固定片拉出(31)

- 3- 將嬰兒提籃背面的兩條肩帶從T型鐵片上取下(7)
- 4- 依(32)所示做法將座墊從調整按鈕周圍移除。
- 5- 將座墊從推車釋鎖按鈕上分離(33)

## 保養與維護

當寶寶大於**6個月**時，小座墊填充物拆除後，請將其存放於寶寶無法接觸到的地方。

請以**30度**以下水溫清洗。

請勿使用熨斗熨燙。

請勿使用漂白劑及乾洗。

請勿使用未經稀釋的中性清潔劑、汽油或其他有機溶劑清洗本兒童保護裝置，否則可能對保護裝置造成損壞。

請使用柔軟的布和溫水清洗嬰兒提籃。

請勿大力扭乾，過分大力扭乾可能留下皺褶。

請於陰涼處鋪平晾乾。

當長時間不使用嬰兒提籃或底座時，請將嬰兒提籃或底座從汽車座椅上拆除，並存放於陰涼處及寶寶不易接觸的地方。



